




Specifications

Model	TD-E2223-EM/IC/PE /WF
Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Image Size	1920×1080
Electronic Shutter	Auto/Manual; Manual: 1/2s ~ 1/100000s
IRIS Type	Fixed IRIS
MIN. Illumination	Color: 0.0085lux@F1.2, AGC ON; B&W: 0 lux with IR
Lens	M8 HD dual lens: 2.3mm@F2.2 Vertical FOV: approx. 74°, Horizontal FOV: approx. 139°, Diagonal FOV: approx. 170°
WDR	120dB
S/N Ratio	≥50dB
BLC	Yes
HLC	Yes
Defog	Yes
DNR	2D/3D NR
Image	
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub/third stream: H.265+/H.265/H.264+/H.264/MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Bit rate Type	VBR/CBR
Bit Rate	64Kbps ~ 6Mbps
Resolution	1080P(1920×1080), 720P(1280×720), D1, CIF, 480×240
Main Stream	1920×1080/1280×720(60Hz: 1~30fps; 50Hz: 1~25fps)
Sub Stream	720P/D1/CIF(60Hz: 1~30fps; 50Hz: 1~25fps)
Third Stream	D1/CIF/480×240(60Hz: 1~30fps; 50Hz: 1~25fps)
Image Setting	Saturation, hue, brightness, contrast, wide dynamic range, sharpness, NR, etc., adjustable through client or web browser
Audio Compression	G711A/U

Personal Properties	Face picture, ID number, list type(group), name, gender, age, phone number, card ID, password, door opening mode, note
Door Opening Modes	By face recognition/swiping card/password/indoor station/APP
Schedule	Yes
Mask Detection	Yes
Secondary Door Station	Yes
Capacity	50000 event items can be recorded
Function	
Remote Monitoring	Web client/indoor station/CMS remote control
Online Connection	



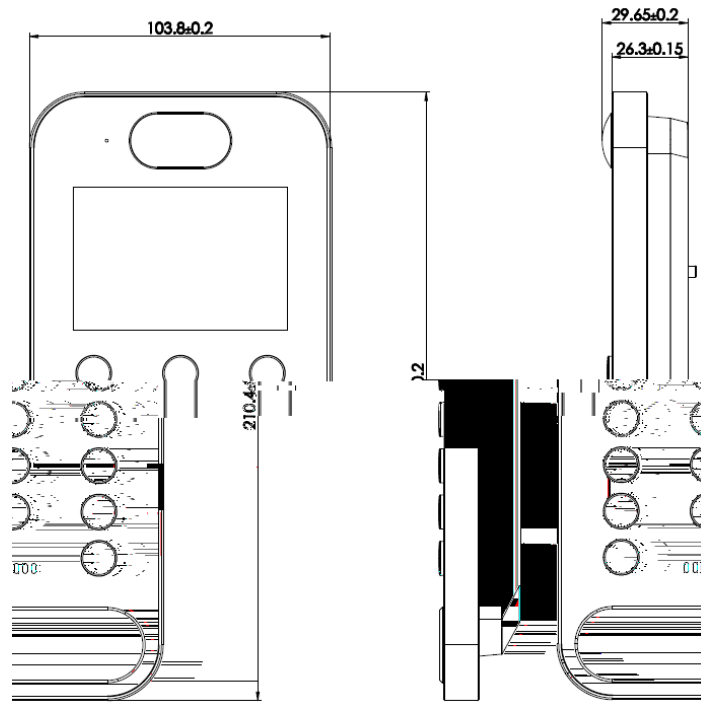

Accessory

Optional



TD-YZJ1008